




Based on Celesco's original string pot design dating back to the late 1960's, the PT510 has become a standard throughout the years for literally thousands of applications including aircraft structural testing, hydraulic cylinder control, valve stem opening, and factory automation.

Available in full stroke ranges up to 100-inches, the PT510 provides a regulated voltage feedback signal linearly proportional to the position of its traveling stainless steel measuring cable. Output signal options include 0-5 and 0-10 vdc.



\*Additional Output Options: 0...5, -5...+5, -10...+10 Vdc

# PT510 Cable Actuated Sensor Instrument Grade • 0..5 Vdc / 0..10 Vdc

Absolute Linear Position • Classic Stringpot Design Stroke Range Options: 0–2 to 0–100 inches Powder Painted & Anodized Aluminum Enclosure Industrial Automation & Testing Applications

## General

Full Stroke Range Options	0-2 to 0-100 inches
Output Signal	05, 010 VDC
Accuracy	$\pm$ 0.15% - $\pm$ 0.28% (see ordering information)
Repeatability	± 0.05% full stroke
Resolution	essentially infinite
Measuring Cable	.019-inch dia. nylon-coated stainless steel rope
Enclosure Material	powder-painted and anodized aluminum
Sensor	plastic-hybrid precision potentiometer
Potentiometer Cycle Life	see ordering information
Maximum Retraction Acceleration	see ordering information
Weight	2 lbs. max.

# Electrical


Input Voltage Input Current Output Impedance Maximum Load Signal Adjustment, Zero Signal Adjustment, Span see ordering information 10 mA maximum 1000 ohms 5000 ohms from factory set zero to 50% of full stroke range

to 50% of factory set span

# Environmental

Enclosure	IP50, NEMA 1
Operating Temperature	-40° to 200°F (-40° to 90°C)
Vibration	up to 10 g to 2000 Hz maximum


# Fig. 1 - Outline Drawing:

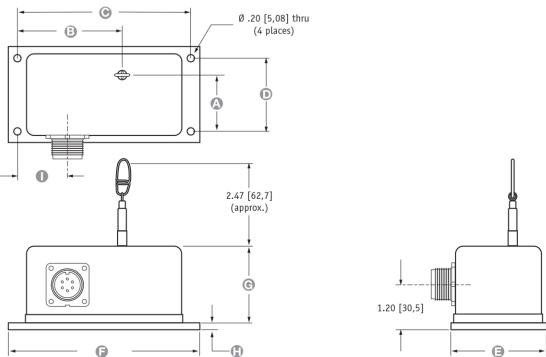

ALL DIMENSIONS ARE IN INCHES [MM] • tolerances are ±0.02 in. [±0,5mm]

Range	A	B	C	D	8	G	G	0	0
2", 10″, 20″	1.34 [34,0]	4.00 [101,6]	7.00 [177,8]	2.00 [50,8]	2.63 [66,8]	7.50 [190,5]	2.10 [53,3]	.16 [4,1]	1.37 [34,8]
5", 25", 50"	1.83 [46,5]	4.00 [101,6]	7.00 [177,8]	2.00 [50,8]	2.63 [66,8]	7.50 [190,5]	2.10 [53,3]	.16 [4,1]	1.37 [34,8]
15", 30"	1.56 [39,6]	4.00 [101,6]	7.00 [177,8]	2.00 [50,8]	2.63 [66,8]	7.50 [190,5]	2.10 [53,3]	.16 [4,1]	1.37 [34,8]
40″	1.64 [41,6]	4.00 [101,6]	7.00 [177,8]	2.00 [50,8]	2.63 [66,8]	7.50 [190,5]	2.10 [53,3]	.16 [4,1]	1.37 [34,8]
60″	2.16 [54,9]	4.19 [106,4]	7.00 [177,8]	2.37 [60,2]	3.25 [82,5]	7.50 [190,5]	2.60 [66,0]	.19 [4,8]	1.37 [34,8]
75″	2.45 [62,2]	4.38 [111,3]	6.75 [171,4]	2.50 [63,5]	3.63 [92,2]	7.50 [190,5]	2.86 [72,6]	.19 [4,8]	1.37 [34,8]
100″	3.10 [78,7]	4.19 [106,4]	7.38 [187,5]	3.00 [76,2]	4.25 [108,0]	8.00 [203,2]	3.79 [96,3]	.19 [4,8]	3.69 [93,7]

# **Ordering Information**



Sample Model Number:

PT510 - 0025 - 111 - 1110



### Full Stroke Range:


lorder code:	0002	0005	0010	0015	0020	0025	0030	0040	0050	0060	0075	0100
full stroke range, min:	2 in.	5 in.	10 in.	15 in.	20 in.	25 in.	30 in.	40 in.	50 in.	60 in.	75 in.	100 in.
accuracy (% of f.s.):	0.28%	0.28%	0.18%	0.18%	0.15%	0.18%	0.15%	0.15%	0.15%	0.15%	0.15%	0.15%
potentiometer cycle life*:	$2.5 \times 10^6$	2.5 x 10 <sup>6</sup>	5 x 10 <sup>5</sup>	$2.5 \times 10^{5}$	$2.5 \times 10^{5}$	2.5 x 10 <sup>5</sup>	2.5 x 10 <sup>5</sup>	$2.5 \times 10^{5}$				

\*–1 cycle is defined as the travel of the measuring cable from full retraction to full extension and back to full retraction

## Measuring Cable Tension:


Order code:		1				н	
	star	standard tension					1
	tension, ±20%		max acceleration		tension, ±40%		max acceleration
2, 10, 20 inch range:	12 oz.		11 g		65 oz.		53 g
5, 25, 50 inch range:	5 oz.		2 g		26 oz.	•	11 g
15, 30 inch range:	8 oz.	•	3 g		43 oz.	•	23 g
40 inch range:	6 oz.		4 g		33 oz.	•	16 g
60 inch range:	13 oz.		4 g		22 oz.		8 g
75 inch range:	10 oz.	•	3 g		31 oz.	•	12 g
100 inch range:	13 oz.	•	5 g	:	52 oz.	•	20 g

#### **Measuring Cable Exit:**

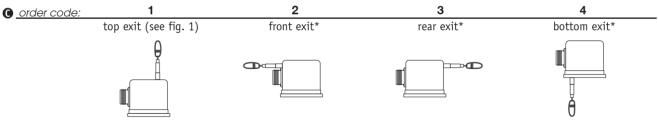


\*-note: dimensions for optional cable exits not controlled on this datasheet, please contact factory

#### **Sensing Circuit:**

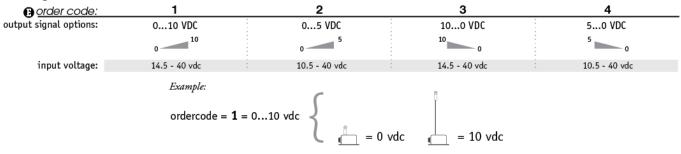


#### **Electrical Connection:**

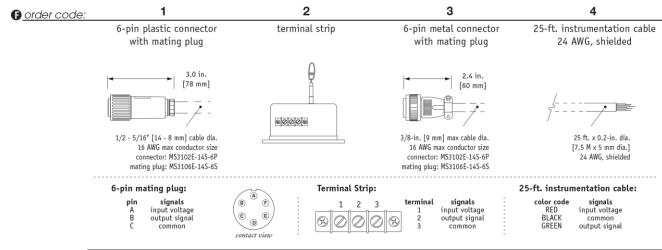

# **Output Signal Selection**

The output signal direction can be reversed at any time by simply changing the dip-switch settings found on the internal signal board. After the settings have been changed, adjustment of the Zero and Span trimpots will be required to precisely match signal values to the beginning and end points of the stroke.

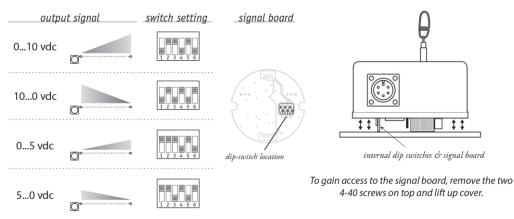

#### **NORTH AMERICA**

Measurement Specialties, Inc., a TE Connectivity company 20630 Plummer Street Chatsworth, CA 91311 Tel +1 800 423 5483 Tel +1 818 701 2750 Fax +1 818 701 2799 info@celesco.com

#### **TE.com/sensorsolutions**

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, use or misuse of the product. Users of TE Connectivity should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

PT510 12/01/2015