Cable-Extension Position Transducer

0/4...20 mA Output • Hazardous Area Certification Ranges: 0-600 to 0-1700 inches **Industrial Grade**







<Extended Range> PT942

Specification Summary:

GENERAL
Full Stroke Range Options—on this datasheet 0-600 to 0-1700 inches
Output Signal Options
Accuracy ± 0.12% full stroke
Repeatability
Resolutionessentially infinite
Measuring Cablenylon-coated stainless steel
Enclosure Materialpowder-painted aluminum or 303 stainless steel
Sensor plastic-hybrid precision potentiometer
Potentiometer Cycle Life 250,000, min. – before signal degradation can occur
Maximum Retraction Acceleration/ Velocitysee ordering information
Weight, Aluminum (Stainless Steel) Enclosure

ELECTRICAL

GENERAL

Input Voltage	see ordering information
Input Current	20 mA max.
Maximum Loop Resistance (Load)	(loop supply voltage – 8)/0.020
Circuit Protection	38 mA max.
Impedance	100M ohms @ 100 VDC, min.
Output Signal Adjustment	
Zero Adjustment	from factory set zero to 50% of full stroke range
Span Adjustment	to 50% of factory set span

ENVIRONMENTAL

ENVINORMENTAL	
Enclosure	NEMA 4/4X/6, IP 67/68
Hazardous Area Certification	see ordering information
Operating Temperature	40° to 200°F (-40° to 90°C)
Vibration	ip to 10 G's to 2000 Hz maximum
Thermal Effects	
Zero	0.01% f.s./°F, max.
Span	0.01%/°F, max.

EMC COMPLIANCE PER DIRECTIVE 89/336/EEC


Emission / Immunity......EN50081-2 / EN50082-2



The PT9420 is a great value for demanding longrange applications requiring a 4 - 20 mA linear position feedback signal. Sealed to meet NEMA 4 standards, this Cable-Extension Transducer will perform even under the harshest of environmental conditions.

As a member of Celesco's innovative family of NEMA-4 rated cable-extension transducers, the PT9420 offers numerous benefits. It installs in minutes, functions properly without perfectly parallel alignment, and when its cable is retracted, it measures only 6".


Output Signal



PT9420 Extended Range • Cable-Extension Transducer: 0/4...20 mA Output Signal

Ordering Information:

Model Number:



Sample Model Number:

PT9420 - 1200 - 111 - 1110

A enclosure/cable tension:

• cable exit:

1200 inches aluminum

Output signal: 4...20 mA, 2-wire electrical connection: 6-pin plastic connector


Full Stroke Range:

® order code:	0600	0800		1000		1200		1500		1700
full stroke range, min:	600 in.	800 in.	:	1000 in.	:	1200 in.		1500 in.	:	1700 in.
cable tension (±35%):	27 oz.	24 oz.	:	20 oz.	:	19 oz.	:	18 oz.	:	17 oz.
	.034-in. dia.	.019-in. dia.		.019-in. dia.	:	.019-in. dia.	:	.014-in. dia.		.014-in. dia.
measuring cable:	nylon-coated	nylon-coated		nylon-coated		nylon-coated	:	nylon-coated		nylon-coated
	stainless	stainless	:	stainless		stainless	:	stainless	:	stainless


Enclosure Material:

A <u>order code:</u>	1		3	
enclosure material:	powder-painted aluminum		303 stainless steel	
max. acceleration:	1G	•	.33G	
max. velocity:	60 inches/sec.	:	20 inches/sec.	

Cable Exit:

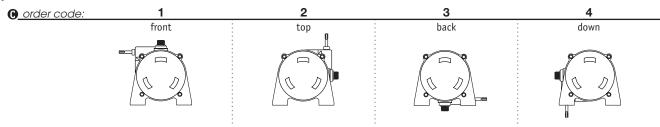


Output Signals:

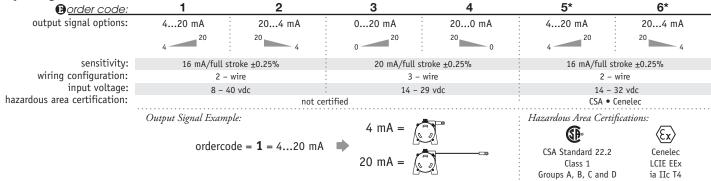

*IMPORTANT: intrinsically safe when powered from a CSA certified zener barrier rated 28 VDC max, 110 mA max per installation drawing#677984


Ordering Information:

Electrical Connection:

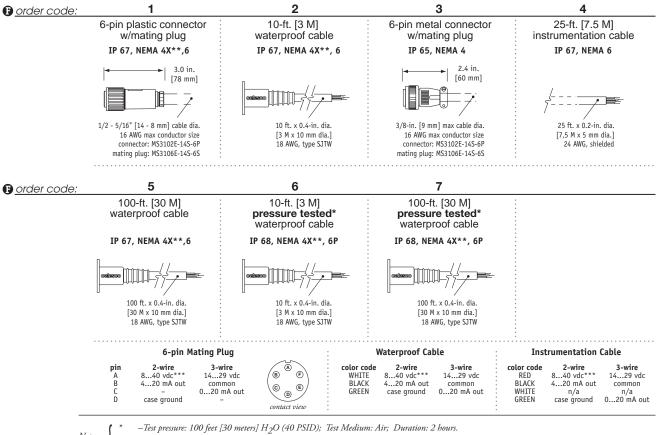


-NEMA 4X applies to stainless steel enclosure only. -14-32 VDC for hazardous area option.

Output Signal Selection:

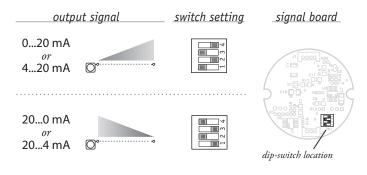

The output signal direction can be reversed at any time by simply changing the dip-switch settings found on the internal signal board. After the settings have been changed, adjustment of the Zero and Span trimpots will be required to precisely match signal values to the beginning and end points of the stroke.


To gain access to the signal board, remove four Allen-Head Screws and remove end cover bracket.

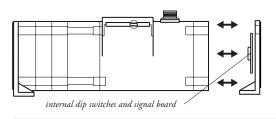

Caution! Do Not Remove Spring-Side End Cover

Removing spring-side end cover could cause spring to become unseated and permanently damaged.

Outline Drawing

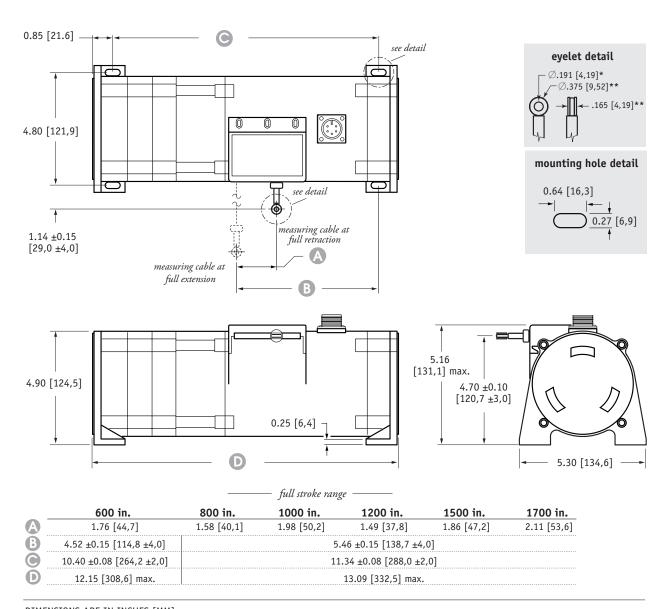

DIMENSIONS ARE IN INCHES [MM] tolerances are 0.03 IN. [0.5 MM] unless otherwise noted.

^{*} tolerance = +.005 -.001 [+.13 -.03] ** tolerance = +.005 -.005 [+.13 -.13]