



◎ FEATURES

- Tension application
- Application for limited space
- Small size
- Protection class IP67



◎ Material

- HMNT-1L~HMNT 2L : A/L
- HMNT-5L or higher Stainless steel

◎ Cable

- Braided shield 4-wire round cable with Moving Cable $\varnothing 3.7 - 4M$

◎ DIMENSIONS

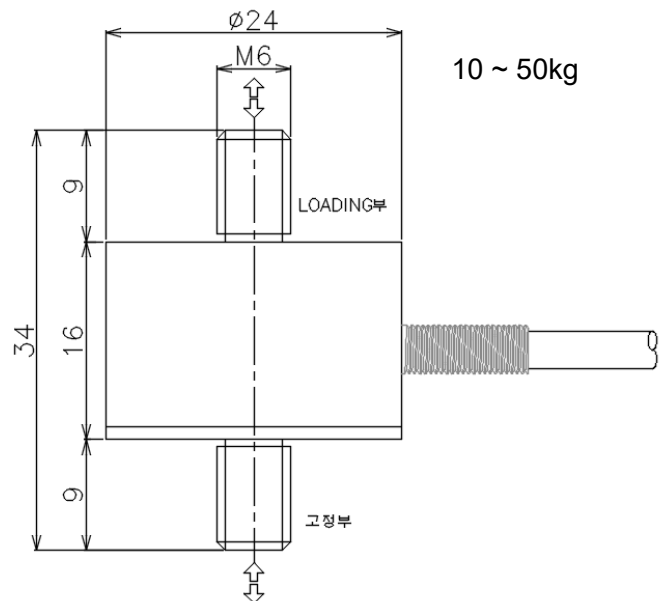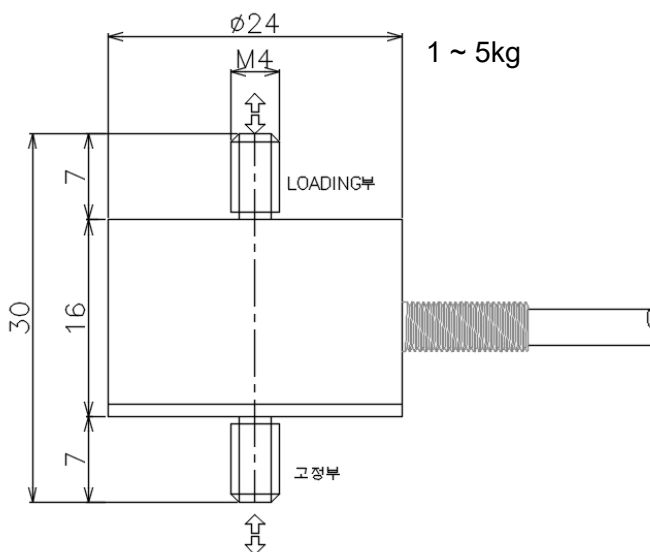

◎ SPECIFICATIONS

Max. Capacity	kgf	1, 2, 5, 10, 30, 50 kgf
Rated output	mV/V	0.5 ± 0.1
Zero balance	mV/V	0.0 ± 0.1
Combined error	%	0.1
Repeatability	%	0.1
Creep(30min.)	%	0.1
Temperature effect on		
Zero value	%/10℃	0.1
Output value	%/10℃	0.1
Excitation		
Recommended	V	10
Maximum	V	15
Resistance		
Input	Ω	350 ± 3.5
Output	Ω	350 ± 3.5
Insulation	M Ω	$> 2,000 @ 50V DC$
Compensated temp.range	℃	-10 ~ +40
Operating temp. range	℃	-20 ~ +70

* Specifications are subject to change without notice