

VKK2-8, VKK2R-8




Junction boxes

Special features


- Parallel connection of up to 8 load cells
- Corner balancing via integrated resistor network
- EMC-proof according to EN 45 501 and EN 61 323 due to HBM shielding method
- Degree of protection IP65 to EN 60 529
- Expandable to more than eight load cells
- VKK2R-8 with stainless housing



Dimensions (in mm; 1 mm= 0.03937 inches)

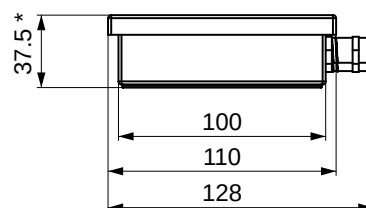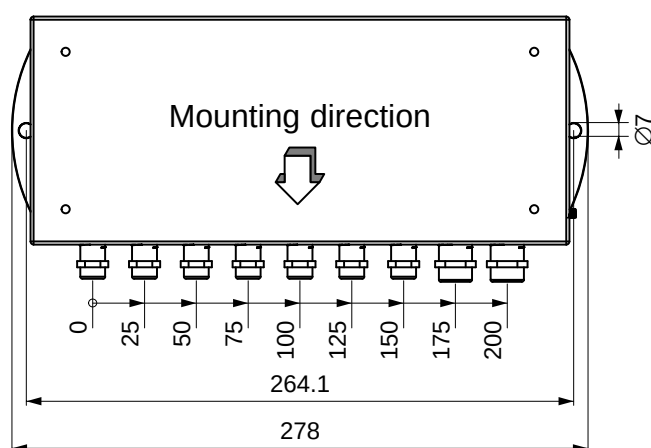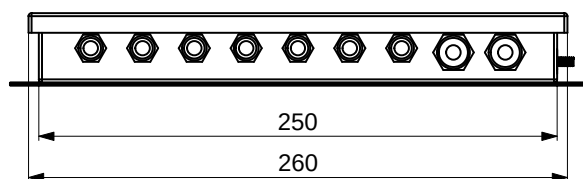


* with rubber seal
(mounted state)

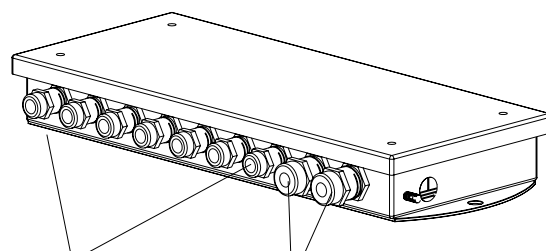

7x M12, a.f. 14 for
cable Ø 4 ... 6.5 mm

2x M16, a.f. 17 for
cable Ø 5 ... 9 mm

Corner load balancing

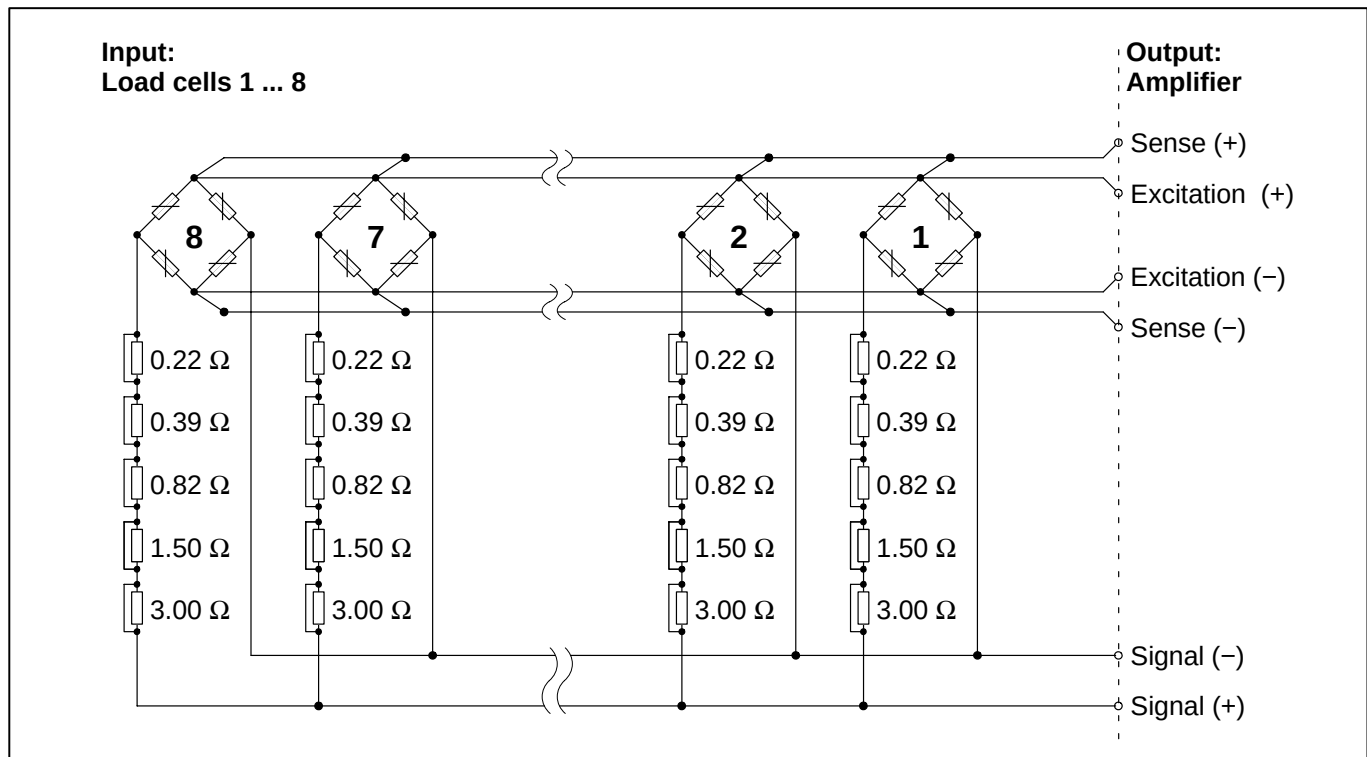

Specifications

Type		VKK2-8	VKK2R-8
Resistor network for corner load balancing	Ω	0.22...5.93 (in 30 steps)	
Max. permissible voltage	V	18	
Nominal temperature range		-20...+85	
Operating temperature range	°C	-20...+85	
Storage temperature range		-40...+85	
Interference immunity check			
Electromagnetic field (26...1000 MHz)	V/m	10	
Burst (to connected cables)	V	1000	
Electrostatic discharge (to housing)	V	6000	
Weight, approx.	kg	1	
Max. wire cross section of cable strands	mm ²	1.5	
Degree of protection according to EN 60529 (IEC 529)		IP65 (dust-tight and protected against water jets)	
Materials:			
Housing		powder-coated steel sheet	stainless steel
Sleeve nut		Housing: RAL 7035 /RAL 5007	
Clamping cone		7 × M12, a.f.14, 2 × M16, a.f.17 nickel-plated brass	Neoprene

Modifications reserved.
All details describe our products in general form only. They are not to be understood as express warranty and do not constitute any liability whatsoever.

Hottinger Baldwin Messtechnik GmbH

Im Tiefen See 45, D-64293 Darmstadt, Germany
Tel.: +49 6151 803-0 Fax: +49 6151 803 9100
Email: support@hbm.com Internet: www.hbm.com



measurement with confidence