
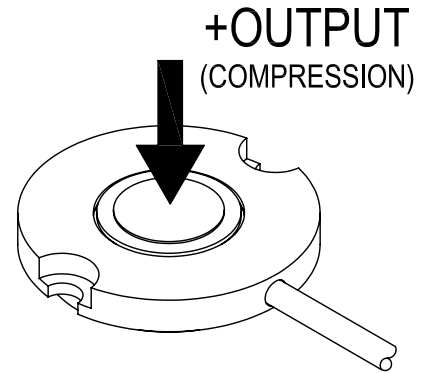


FUTEK MODEL QLA307 Custom Low Profile Load Washer

ITEM NUMBER: QSH01207

INCH [mm]		R.O.= Rated Output	
WIRING CODE			
+Excitation	-Excitation	+Signal	-Signal
RED	BLACK	GREEN	WHITE
Shield			
Floating			

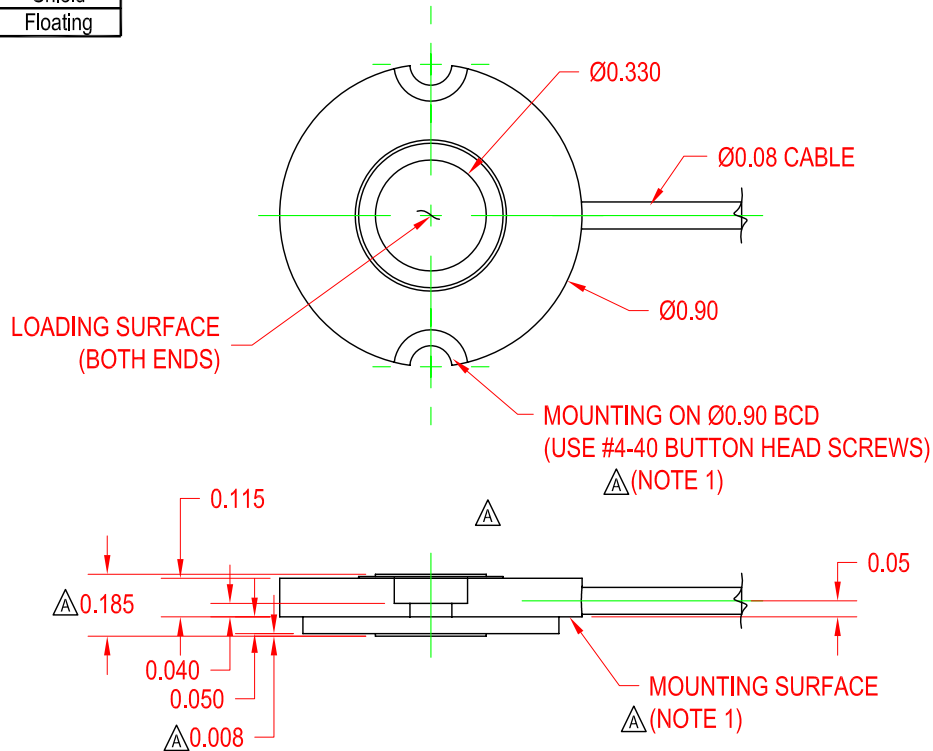

SPECIFICATIONS:

RATED OUTPUT	2 mV/V nom.
CAPACITY	4000 lb
SAFE OVERLOAD	150% of R.O.
ZERO BALANCE	±4% of R.O.
EXCITATION (VDC OR VAC)	15 MAX
BRIDGE RESISTANCE	350 Ω nom
NONLINEARITY	±3% of R.O.
HYSTERESIS	±3% of R.O.
NONREPEATABILITY	±0.5% of R.O.
TEMP. SHIFT ZERO	±0.02% of R.O./°F (0.036% of R.O./°C)
TEMP. SHIFT SPAN	±0.02% of LOAD/°F (0.036% of LOAD/°C)
COMPENSATED TEMP.	60 to 160°F (15 to 72°C)
OPERATING TEMP.	-40 to 200°F (-40 to 93°C)
WEIGHT	0.3 oz
MATERIAL	STAINLESS STEEL
CABLE: 29 AWG, 4 Conductor Spiral Shielded Silicone Cable, 5 ft Long	

NOTES:

- 1) LEAVE SENSOR MOUNTING SCREWS
1/2 TURN LOOSE TO ALLOW ALIGNMENT
TO CUSTOMER LOADING PLATES

OUTLINE DRAWING

STANDARD NOTES: (Unless Otherwise Specified)


- ALL DIMENSIONS ARE IN INCHES
- DRAWING INTERPRETATION DIMS. PER ASME-Y14.5M
- REMOVE BURRS AND BREAK SHARP EDGES .005 - .015
- THREADS PER HANDBOOK H-28
- DIMENSIONS ARE SHOWN AFTER PLATING

ANGLE:
±1/2°

CHAMFER:
±5°

TOLERANCE:
.X ±0.1
.XX ±0.01
.XXX ±0.005

3rd ANGLE PROJ.



This drawing is submitted solely for the information and exclusive use of the original addressee. It is not to be divulged in whole or in part, by any firm or individual without written permission from:

FUTEK
ADVANCED SENSOR TECHNOLOGY, INC.

10 THOMAS
IRVINE, CA 92618 USA
Phone: (949) 465-0900
Fax: (949) 465-0905

CAGE: 1X8M6

MODEL: **QLA307**

DRAWN BY: R. WALKER

APPROVED BY: -

DWG No.: **F01230-A**

CHECKED BY: J. VARGAS

DATE: **Nov 15, 2008**

CUSTOMER APPROVAL-COMPANY

CUSTOMER APPROVAL-NAME /DATE

REVISIONS: (Refer to dwg # revision sheet)

02-09-09