

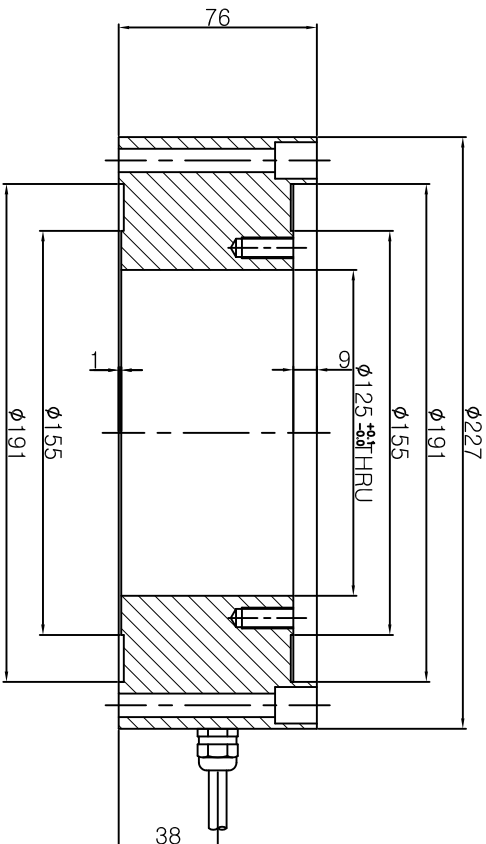


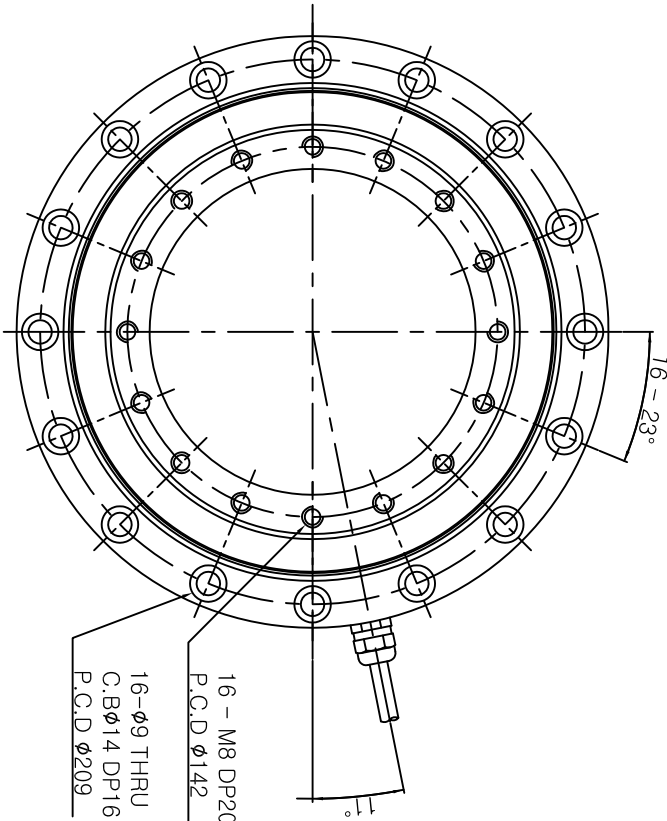

Capacity(용량)	tf	100
Rated Output(정격 출력)	mV/V	1.5 ± 0.015
Zero Balance(무부하 범위)	mV/V	0.0±0.05
Combined Error(종합 오차)	%RO	0.5
Repeatability(반복 출력 허용)	%RO	0.2
Creep for (30min)	%RO	0.05
Temperature effect on(온도변화에 따른 범위)		
Zero Value(영점값)	%RO/10°C	0.05
Output Value(출력값)	%RO/10°C	0.05
Excitation(인가전압)	V	10
Recommended(권고 전압)	V	15
Resistance(저항)	Ω	400±50
Input(입력저항)	Ω	350±3.5
Output(출력저항)	Ω	>2000@50V DC
Insulation(절연저항)	MΩ	-10 ~ +40
Compensated Temp.Range	°C	-30 ~ +80
Operating Temp.Range(작동범위)	°C	

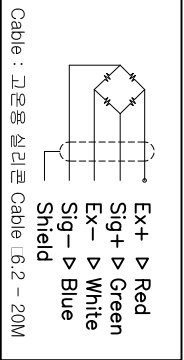

APPROVE		CASKOREA	
CHECKED			
DRAWN	2015.06.15		
DATE			
SCALE		TITLE	CLSW-100T Specification
PROJECT No.		Subcontract	DWG No. CLSW-100T-SPEC
			REV