

Load Cells
(Load Transducers)

Outline

Compressive

Tensile

Tensile &
compressive

Component

Special

Other

Thin Compression Load Cell

● Thickness: 25 mm (5 to 20 kN) ● 5 to 200 kN



*CE compliant models are available. Inquiries are welcome.
*TEDS-installed models are available. Inquiries are welcome.

Thin & high reliability
Hermetically-sealed structure with
inert gas filled in

The LCK-A series load cells have excellent accuracy, reliability, stability, and response. They also have a thin design for convenient installation as detection terminals of weighing systems. This thin design makes them suitable for applications such as conveyors, vehicles, cranes, hoppers, and tanks where the space, especially the height, is limited and the detecting part needs to be downsized.

Specifications

Performance

Rated Capacity	See table below.
Nonlinearity	Within $\pm 0.2\%$ RO (200kN: Within $\pm 0.5\%$ RO)
Hysteresis	Within $\pm 0.2\%$ RO (200kN: Within $\pm 0.5\%$ RO)
Repeatability	0.05% RO or less
Rated Output	2 mV/V $\pm 0.5\%$

Environmental Characteristics

Safe Temperature	-30 to 80°C
Compensated Temperature	-10 to 70°C
Temperature Effect on Zero	Within $\pm 0.007\%$ RO/°C
Temperature Effect on Output	Within $\pm 0.005\%$ /°C

Electrical Characteristics


Safe Excitation	20 V AC or DC
Recommended Excitation	1 to 10 V AC or DC
Input Resistance	350 $\Omega \pm 0.5\%$
Output Resistance	350 $\Omega \pm 0.5\%$
Cable	4-conductor (0.3 mm ²) chloroprene shielded cable, 7.6 mm diameter by 5 m long, bared at the tip (Shield wire is not connected to the case.)

Mechanical Properties

Safe Overloads	150%
Natural Frequencies	See table below.
Weight	See table below.
Degree of Protection	IP67 (IEC 60529)

Optional Accessories Saddle CA

Dimensions

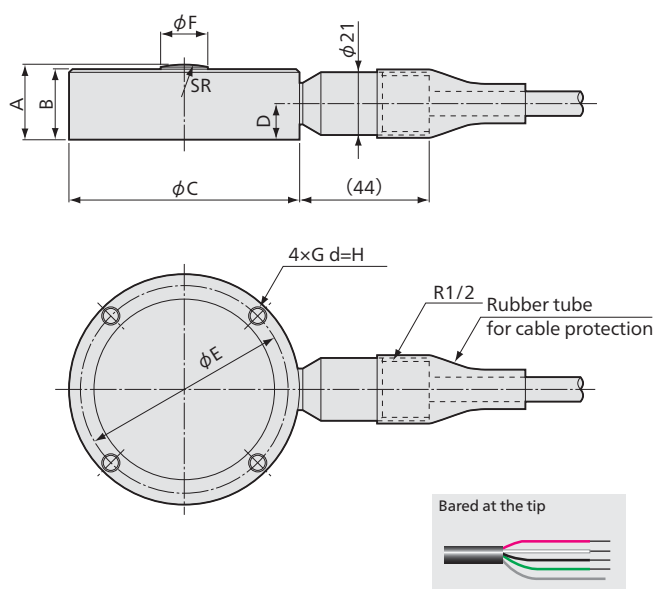

Models	Rated Capacity	Natural Frequencies (Approx.)	A	B	ϕC	D	E	ϕF	G	H	SR	Weight * (Approx.)
● LCK-A-5KN	5 kN	10.7 kHz	25	23.5	78	12	70	16	M5	8	50	700 g
● LCK-A-10KN	10 kN	11.4 kHz										
● LCK-A-20KN	20 kN	14.2 kHz										
LCK-A-50KN	50 kN	24.2 kHz	30	28	98	14.5	80	18	M8	12	70	1.5 kg
LCK-A-100KN	100 kN	14.8 kHz	35	33	108	17.5	90	25	M8	12	70	2.2 kg
LCK-A-200KN	200 kN	12.6 kHz	50	45	118	25	100	35	M8	12	100	3.5 kg

● For delivery date, please contact us.

*Excluding cable