


Load direction




Customizable


Dimensions in "mm"

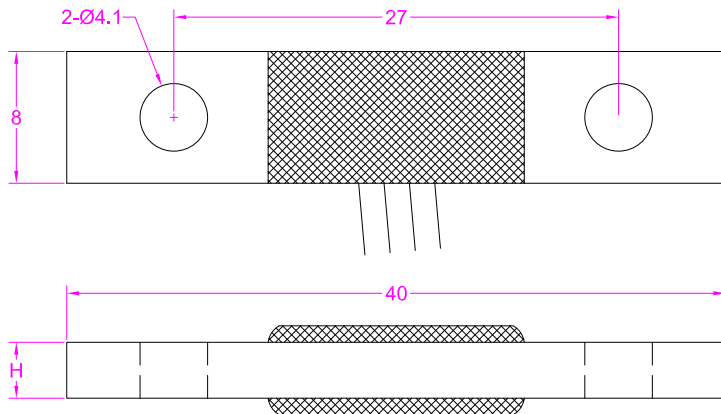

Capacity(N)	100	200	300	400
H(mm)	2.48	3.5	4.28	4.95

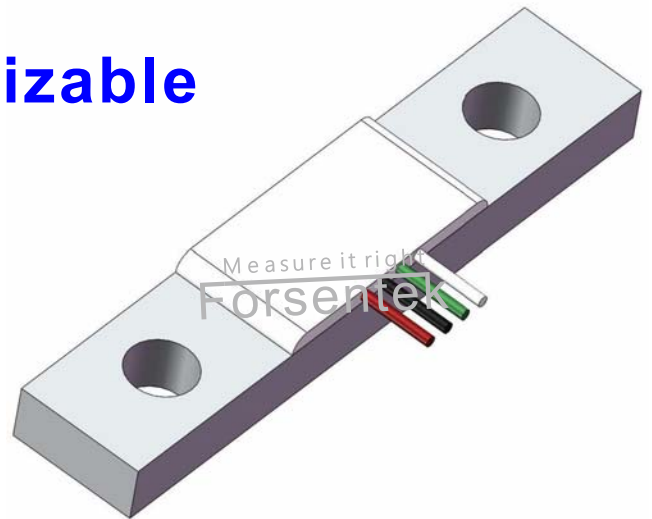

Wiring Diagram



--- Specifications ---

Capacity	100/200/300/400 N		
Rated Output	1.1±0.15 mV/V	Compensated Temp.	0...+25°C
Excitation	3~12V	Operating Temp.	-10...+40°C
Zero Balance	±0.3mV/V	Temp. Shift Zero	±0.02% of R.O./°C
Nonlinearity	±0.1% of R.O.	Temp. Shift Span	±0.02% of R.O./°C
Hysteresis	±0.1% of R.O.	Input Resistance	1000±50Ω
Nonrepeatability	±0.05% of R.O.	Output Resistance	1000±50Ω
Creep(3min)	±0.05% of R.O.	Insulation Resistance	>2000MΩ(50V)
Safe Overload	120% of F.S.	Ingress Protection	IP62
Ultimate Overload	150% of F.S.	Material of Element	Aluminum alloy
Cable	AWG32*85mm		
R.O.=Rated Output F.S.=Full Scale			

• Subject to change without notice