

Plug-in Signal Conditioners M-UNIT

SIGNAL TRANSMITTER


(isolated; max. 200 mA output)

Functions & Features

- Converting a DC process input into a high-power current or voltage up to 200 mA
- Isolation up to 2000 V AC
- High-density mounting

Typical Applications

- Retrofitting 10 – 50 mA DC control system
- DC excitation for an electromagnetic coil which demands a high power



MODEL: SVA-[1][2]-[3][4]

ORDERING INFORMATION

- Code number: SVA-[1][2]-[3][4]
- Specify a code from below for each of [1] through [4].
(e.g. SVA-AN-K3/Q)
- Special input and output ranges (For codes Z & 0)
- Specify the specification for option code /Q
(e.g. /C01/S01)

[1] INPUT

Current

- A: 4 – 20 mA DC (Input resistance 250 Ω)
 A1: 4 – 20 mA DC (Input resistance 50 Ω)
 B: 2 – 10 mA DC (Input resistance 500 Ω)
 C: 1 – 5 mA DC (Input resistance 1000 Ω)
 D: 0 – 20 mA DC (Input resistance 50 Ω)
 E: 0 – 16 mA DC (Input resistance 62.5 Ω)
 F: 0 – 10 mA DC (Input resistance 100 Ω)
 G: 0 – 1 mA DC (Input resistance 1000 Ω)
 H: 10 – 50 mA DC (Input resistance 100 Ω)
 J: 0 – 10 μA DC (Input resistance 1000 Ω)
 K: 0 – 100 μA DC (Input resistance 1000 Ω)
 GW: -1 – +1 mA DC (Input resistance 1000 Ω)
 FW: -10 – +10 mA DC (Input resistance 100 Ω)

Z: Specify current (See INPUT SPECIFICATIONS)

Voltage

- 1: 0 – 10 mV DC (Input resistance 10 kΩ min.)
 15: 0 – 50 mV DC (Input resistance 10 kΩ min.)
 16: 0 – 60 mV DC (Input resistance 10 kΩ min.)
 2: 0 – 100 mV DC (Input resistance 100 kΩ min.)
 3: 0 – 1 V DC (Input resistance 1 MΩ min.)
 4: 0 – 10 V DC (Input resistance 1 MΩ min.)
 5: 0 – 5 V DC (Input resistance 1 MΩ min.)
 6: 1 – 5 V DC (Input resistance 1 MΩ min.)
 4W: -10 – +10 V DC (Input resistance 1 MΩ min.)
 5W: -5 – +5 V DC (Input resistance 1 MΩ min.)
 0: Specify voltage (See INPUT SPECIFICATIONS)

[2] OUTPUT

Current

- H: 10 – 50 mA DC (Load resistance 400 Ω max.)
 L: 0 – 50 mA DC (Load resistance 400 Ω max.)
 M: 0 – 100 mA DC (Load resistance 200 Ω max.)
 N: 0 – 200 mA DC (Load resistance 50 Ω max.)
 Z: Specify current (See OUTPUT SPECIFICATIONS)

Voltage

- 4: 0 – 10 V DC (Load resistance 50 Ω min.)
 5: 0 – 5 V DC (Load resistance 25 Ω min.)
 6: 1 – 5 V DC (Load resistance 25 Ω min.)
 8: 0 – 20 V DC (Load resistance 200 Ω min.)
 0: Specify voltage (See OUTPUT SPECIFICATIONS)

[3] POWER INPUT

AC Power

- K3: 100 – 120 V AC
 (Operational voltage range 90 – 132 V, 47 – 66 Hz)
 L3: 200 – 240 V AC
 (Operational voltage range 180 – 264 V, 47 – 66 Hz)

DC Power

- P: 110 V DC
 (Operational voltage range 85 – 150 V, ripple 10 %p-p max.)

[4] OPTIONS

blank: none

/Q: With options (specify the specification)

SPECIFICATIONS OF OPTION: Q (multiple selections)

COATING (For the detail, refer to M-System's web site.)

- /C01: Silicone coating
 /C02: Polyurethane coating
 /C03: Rubber coating

TERMINAL SCREW MATERIAL

- /S01: Stainless steel

GENERAL SPECIFICATIONS

Construction: Plug-in

Connection: M3.5 screw terminals

Screw terminal: Chromated steel (standard) or stainless steel

Housing material: Flame-resistant resin (black)

Isolation: Input to output to power

Overrange output: 0 mA or 0 V up to 105 % of upper range value

Zero adjustment: -25 – +25 % no output below 0 mA or 0 V (front)

Span adjustment: 50 to 100 % for the rated input span (front)

INPUT SPECIFICATIONS**■ DC Current:**

Shunt resistor attached to the input terminals (0.5 W)

Specify input resistance value for code Z.

■ DC Voltage: -30 – +30 V DC

Span: Min. 3 mV, max. 30 V

Offset: Max. 1.5 times span

Input resistance

Span 3 – 10 mV : $\geq 10\text{ k}\Omega$

Span 10 – 100 mV : $\geq 10\text{ k}\Omega$

Span 0.1 – 1 V : $\geq 100\text{ k}\Omega$

Span $\geq 1\text{ V}$: $\geq 1\text{ M}\Omega$

OUTPUT SPECIFICATIONS

■ DC Current: 0 – 200 mA DC

Minimum span: 20 mA

Zero suppression: max. 30 % of span

Load inductance: 1 H max.

Load resistance

Max. current $\leq 100\text{ mA}$: Output drive max. 20 V

100 mA < max. current $\leq 200\text{ mA}$: $R_L [\Omega] = 2 [W] / (\text{max. current [A]})^2$

■ DC Voltage: 0 – 20 V DC

Minimum span: 2 V

Zero suppression: Max. 30 % of span

Load resistance

Max. voltage $\leq 10\text{ V}$: $R_L [\Omega] = \text{max. voltage [V]} / 0.2 [\text{A}]$

10 V < max. voltage $\leq 20\text{ V}$: $R_L [\Omega] = (\text{max. voltage [V]})^2 / 2 [W]$

INSTALLATION**Power consumption**

•AC: Approx. 10 VA, 5 W max.

•DC: $\leq 5\text{ W}$

Operating temperature: -5 to + 50°C (23 to 122°F)

Operating humidity: 30 to 90 %RH (non-condensing)

Mounting: Surface or DIN rail

Weight: 300 g (0.66 lb)

PERFORMANCE in percentage of span

Accuracy: $\pm 0.2\%$

Temp. coefficient: $\pm 0.02\%/^{\circ}\text{C}$ ($\pm 0.01\%/^{\circ}\text{F}$)

Response time: $\leq 0.5\text{ sec.}$ (0 – 90 %)

Load effect

Current output: $\pm 0.2\%$ over load range

Voltage output: $+0.2\%$ or $- \{0.2 + (0.3 [\Omega] \times \text{max. load [A]}) / \text{output span [V]} \times 100\} \%$ over load range

Line voltage effect: $\pm 0.2\%$ over voltage range

Insulation resistance: $\geq 100\text{ M}\Omega$ with 500 V DC

Dielectric strength: 2000 V AC @1 minute (input to output to power to ground)

STANDARDS & APPROVALS**EU conformity:**

EMC Directive

EMI EN 61000-6-4

EMS EN 61000-6-2

Low Voltage Directive

EN 61010-1

Measurement Category II


Pollution Degree 2

Input or output to power: Reinforced insulation (300 V)

Input to output: Basic insulation (300 V)


RoHS Directive

EXTERNAL DIMENSIONS unit: mm [inch]

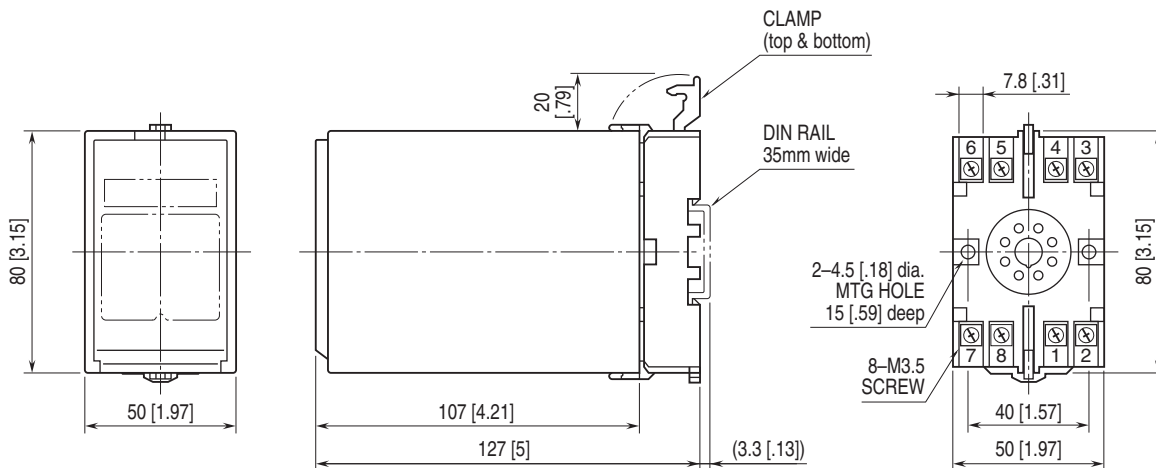


• When mounting, no extra space is needed between units.

TERMINAL ASSIGNMENTS unit: mm [inch]

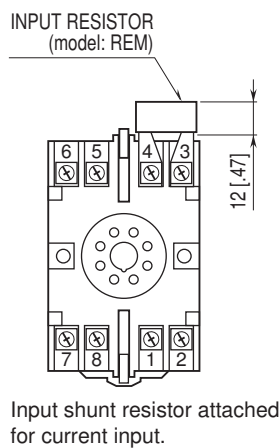

SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

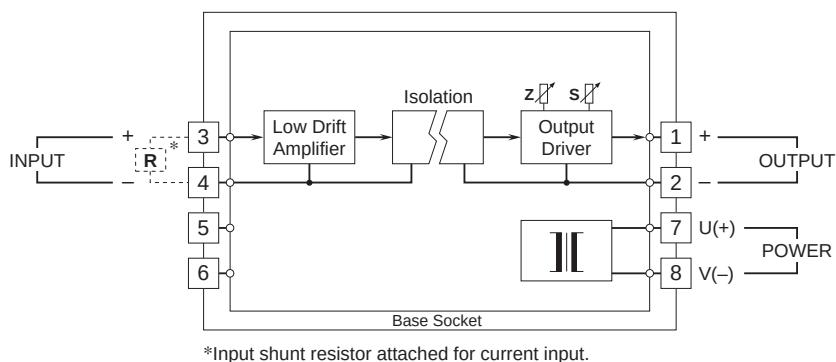

Specifications are subject to change without notice.