




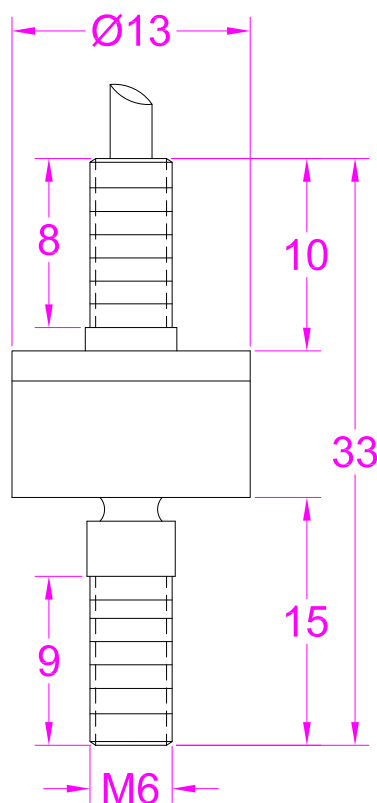

Load direction



Wiring Diagram

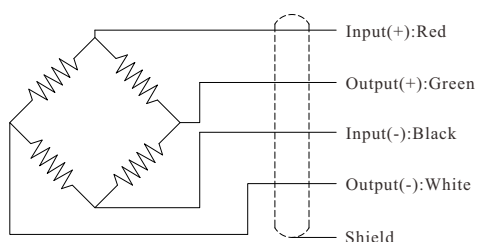

--- Specifications ---

Capacity	10/20/30/50/100kg		
Rated Output	0.8~1.2mV/V	Compensated Temp.	-10...+40°C
Excitation	5~12V	Operating Temp.	-20...+60°C
Zero Balance	±5% of R.O.	Temp. Shift Zero	±0.01% of R.O./°C
Nonlinearity	±1% of R.O.	Temp. Shift Span	±0.01% of R.O./°C
Hysteresis	±1% of R.O.	Input Resistance	350±50Ω
Nonrepeatability	±0.3% of R.O.	Output Resistance	350±5Ω
Creep(30min)	±0.1% of R.O.	Insulation Resistance	>5000MΩ(50V)
Safe Overload	120% of F.S.	Ingress Protection	IP66
Ultimate Overload	200% of F.S.	Material of Element	Stainless steel
Cable	Ø2*1000mm 4-core shielded cable		
R.O.=Rated Output F.S.=Full Scale			

• Subject to change without notice