

FLC 3A

HYGIENIC COMPRESSION LOAD CELL - FOR FOOT

LAUMAS®



Capacity from 1000 kg to 20000 kg



설치 예시
위생 foot에 대한 설치 예시



- 17-4 PH STAINLESS STEEL
- COMBINED ERROR $\leq \pm 0.1\%$
- IP69K PROTECTION RATING
- CABLE SUITABLE FOR CONTACT WITH FOOD
- ADJUSTABLE HEIGHT
- HYGIENIC DEVICE RPSCQC AUTHORIZED BY 3-A SSI.

CAPACITY	kg	THREAD	NET WEIGHT (kg)
1000		M12	1.6
2000		M12	1.52
5000		M16	1.7
5000		M20	1.7
10000		M24	1.7
10000		M30	2.21
20000		M36	2.5

Foot not included.

CERTIFICATIONS



Equivalent of the CE marking for the United Kingdom



American standard that regulates the design, production and use of hygienic equipment

CERTIFICATIONS ON REQUEST




Calibration report

LAT Accredia calibration certificate ISO 376 or ASTM E74 for capacities from 1000 kg to 10000 kg



ATEX II 3GD (zone 2-22) (CE - UKCA)

DIMENSIONS AND TECHNICAL SPECIFICATIONS

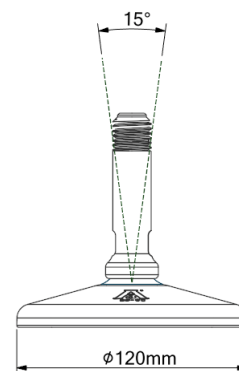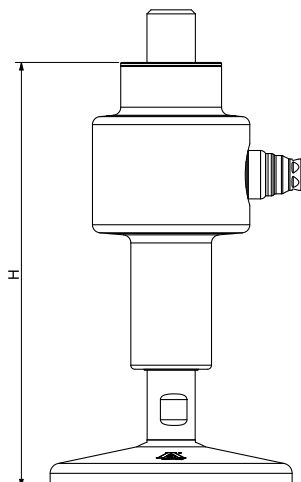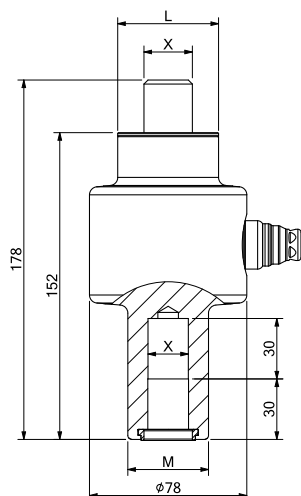

각도 조정

CAPACITY	X	L (mm)	M (mm)	H (FLC+HD)
1000 kg	M12x1.75	24	40	200~210 mm
2000 kg	M12x1.75	24	40	
5000 kg	M16x2	30	40	
5000 kg	M20x2.5	35	40	
10000 kg	M24x3	50	40	
10000 kg	M30x3.5	50	50	
20000 kg	M36x4	50	50	

설치 참고 사항:

- 발을 끝까지 나사로 고정합니다
- 발을 살짝 풀어서 조정합니다(최대 편차: 10mm).

자세한 내용은 HD 데이터 시트를 참조하세요.

요청 시: 다웰 고정이 있는 위생용 foot

기타 유형의 위생용, 비위생용 발 또는 맞춤형 제품에 대해서는 <https://martinlevelling.it>에 문의하세요.


TECHNICAL FEATURES

Material	17-4 PH stainless steel
Nominal load	1000 - 2000 - 5000 - 10000 - 20000 kg
Combined error	$\leq \pm 0.1\%$
Protection rating	IP69K

Rated output	2.0 mV/V $\pm 0.1\%$	Input resistance	350 $\Omega \pm 20$
Temperature effect on zero	0.005% $^{\circ}\text{C}$	Output resistance	350 $\Omega \pm 5$
Temperature effect on span	0.005% $^{\circ}\text{C}$	Zero balance	$\pm 1\%$
Compensated temperature range	-10 $^{\circ}\text{C}$ / +50 $^{\circ}\text{C}$	Insulation resistance	>5000 M Ω
Operating temperature range	-20 $^{\circ}\text{C}$ / +70 $^{\circ}\text{C}$	Safe overload (% of full scale)	150%
Creep at nominal load in 30 minutes	0.05%	Ultimate overload (% of full scale)	300%
Max supply voltage without damage	5 ÷ 15 VDC	Deflection at nominal load	0.3 mm

ELECTRICAL CONNECTIONS

Cable length	5 m: 1000 kg, 2000 kg, 5000 kg, 10000 kg (M24) 10 m: 10000 kg (M30), 20000 kg
Cable diameter	5 mm
Cores	6 x 0.20 mm ²



SHIELD

+ SIGNAL GREEN

+ EXCITATION RED

+ REF./SENSE BLUE

- SIGNAL WHITE

- EXCITATION BLACK

- REF./SENSE BROWN

The Company reserves the right to make changes to the technical data, drawings and images without notice.