



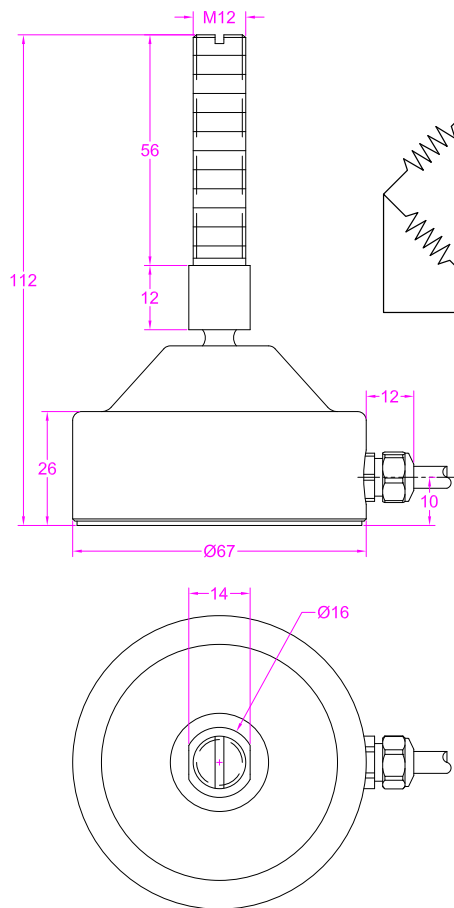

Wiring Diagram

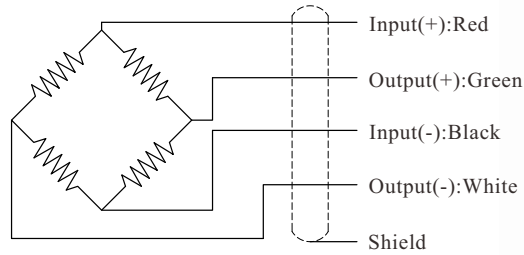

Ordering example

FCLF-0.5t

Model

Capacity



--- Specifications ---

Capacity	0.5/1/1.5/2 t		
Rated Output	2.0 mV/V	Compensated Temp.	-10...40°C
Excitation	3~15V	Operating Temp.	-20...+60°C
Zero Balance	±0.05mV/V	Temp. Shift Zero	±0.01% of R.O./°C
Nonlinearity	±0.1% of R.O.	Temp. Shift Span	±0.01% of R.O./°C
Hysteresis	±0.1% of R.O.	Input Resistance	780±30Ω
Nonrepeatability	±0.1% of R.O.	Output Resistance	700±10Ω
Creep(10min)	±0.05% of R.O.	Insulation Resistance	>5000MΩ(50V)
Safe Overload	150% of F.S.	Ingress Protection	IP66
Ultimate Overload	200% of F.S.	Material of Element	Stainless steel
Cable	Ø4*3000mm 4-core shielded cable		
R.O.=Rated Output F.S.=Full Scale			

• Subject to change without notice