
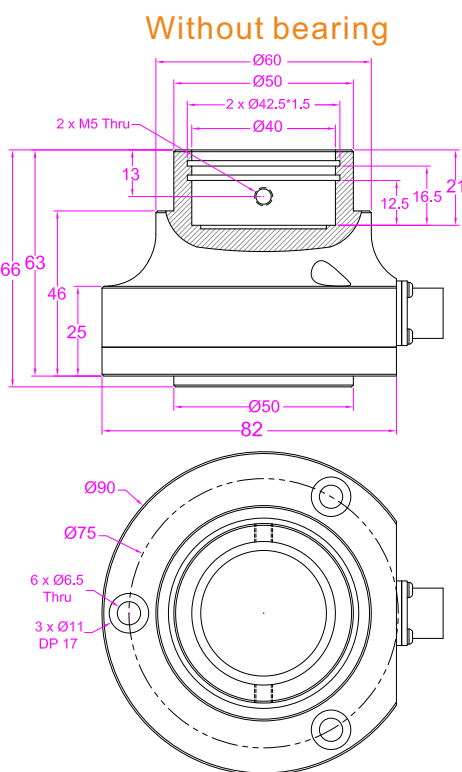


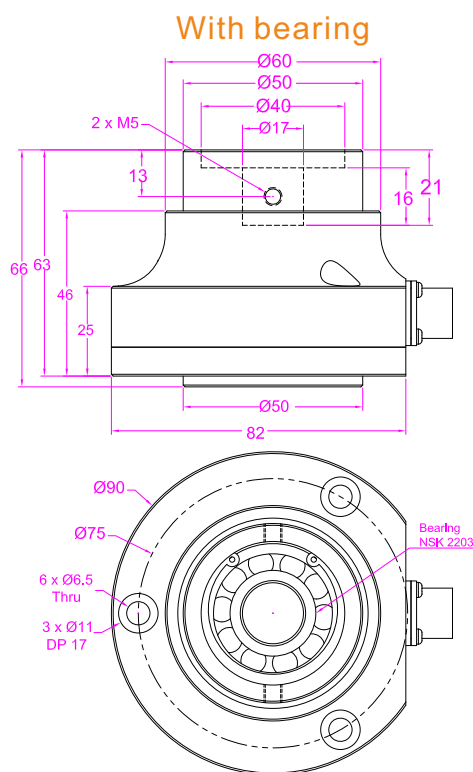


Ordering code

FZTR - 50kg - B

Model Capacity B: With bearing
N: Without bearing

Wiring Diagram

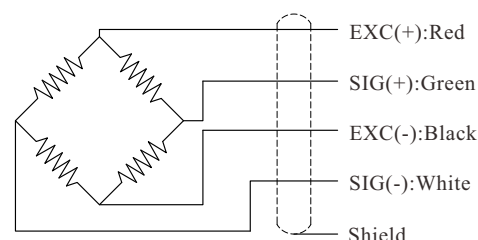

--- Specifications ---

Capacity	30/50/100/200 kg		
Rated Output	2.0 mV/V	Compensated Temp.	0...+40°C
Excitation	3~12V	Operating Temp.	-20...+60°C
Zero Balance	±0.05mV/V	Temp. Shift Zero	±0.03% of R.O./°C
Nonlinearity	±0.2% of R.O.	Temp. Shift Span	±0.03% of R.O./°C
Hysteresis	±0.2% of R.O.	Input Resistance	380±30Ω
Nonrepeatability	±0.1% of R.O.	Output Resistance	352±3Ω
Creep(5min)	±0.05% of R.O.	Insulation Resistance	>2000MΩ(50V)
Safe Overload	150% of F.S.	Ingress Protection	IP54
Ultimate Overload	200% of F.S.	Material of Element	Alloy steel
Cable	Ø5.2*2000mm 4-core shielded cable		
R.O.=Rated Output F.S.=Full Scale			

• Subject to change without notice