


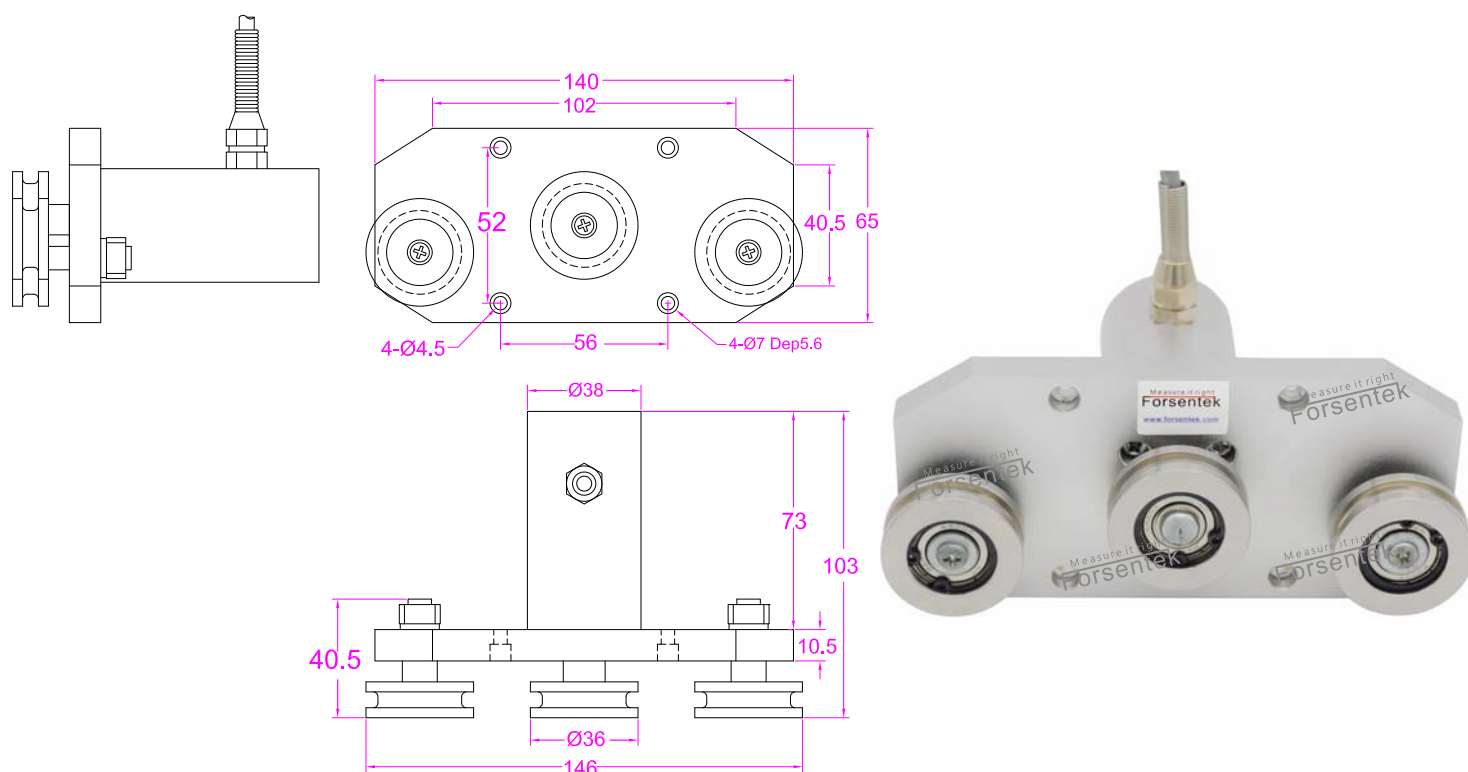


--- Specifications ---


Capacity	10/20/50/100/200/300/500/700/1k/1.5k/2k N		
Rated Output	1.5mV/V	Excitation	5-15V
	0-5V/2-10mA		12V DC
	0-5V/0-10V/ 4-20mA		24V DC
Zero Balance	±5% of R.O.	Temp. Shift Zero	±0.05% of R.O./°C
Nonlinearity	±0.5% of R.O.	Temp. Shift Span	±0.02% of R.O./°C
Hysteresis	±0.5% of R.O.	Input Resistance	690±100Ω
Nonrepeatability	±0.2% of R.O.	Output Resistance	650±10Ω
Creep(5min)	±0.1% of R.O.	Insulation Resistance	>2000MΩ(50V)
Safe Overload	120% of F.S.	Ingress Protection	IP50
Operating Temp.	-20...+60°C	Material of Element	Aluminum alloy
Cable	Ø5*2000mm 4-core shielded cable		
R.O.=Rated Output F.S.=Full Scale/			

• Subject to change without notice

Loading example

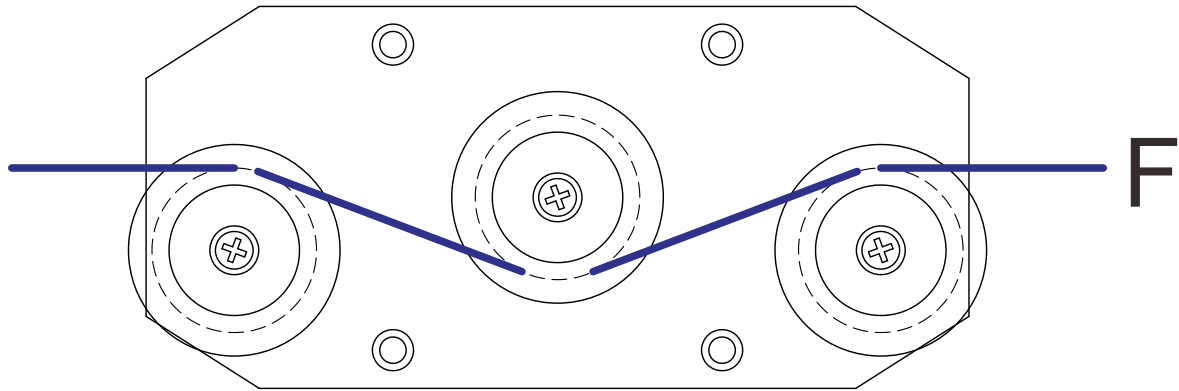

Guide wheel

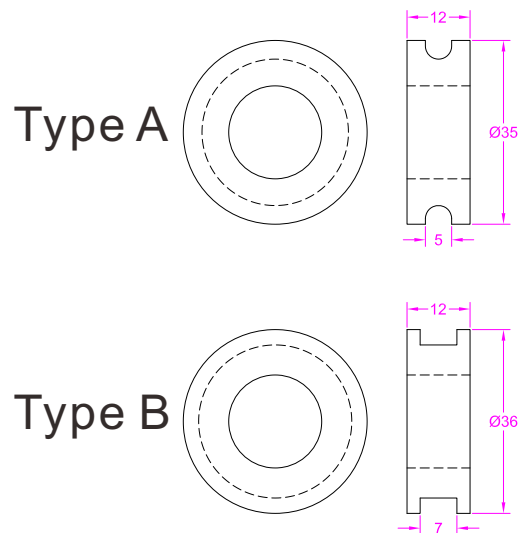

Ordering code

