




# MODEL ZCC200

## FUTEK 4 POSITION MICRO CIRCULAR CONNECTOR (CC19)




### FUTEK 4 PIN MICRO CIRCULAR (CC19)


1	+ EXCITATION	Red
2	- EXCITATION	Black
3	- SIGNAL	White
4	+ SIGNAL	Green



#### KEY


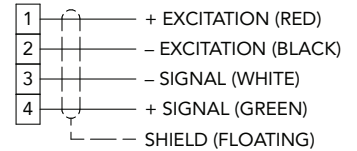


### DIMENSIONS inches [mm]

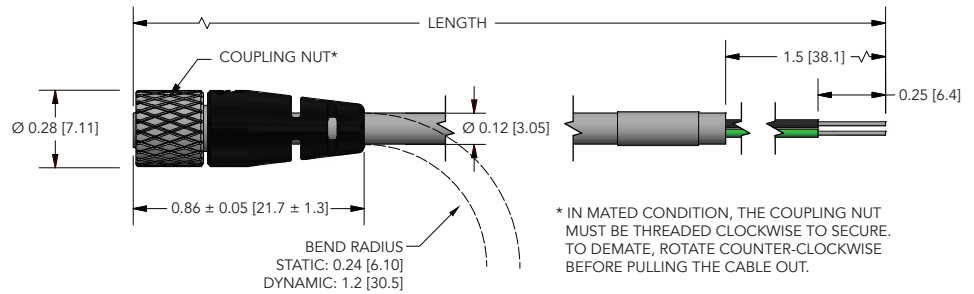

### FEATURES

- Easily thread on and off from the sensor
- Environmental Protection, IP67 (in mated condition, on sensor side only)
- 95% Braided Shield coverage for optimal EMI protection
- Gold Plate Contacts (ZCC200 Micro Connector Side)
- Minimum of 250 Mate and Demate Cycles (ZCC200 Micro Connector Side)

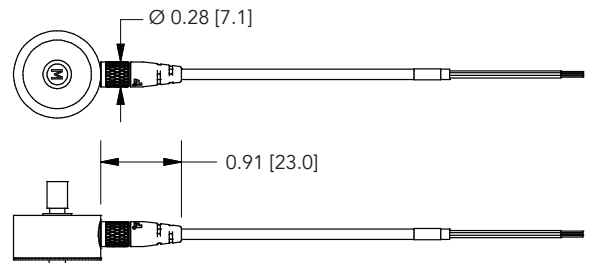

ZCC200 DIMENSIONS WHEN MATED TO SENSORS

### VARIATIONS

ITEM #	LENGTH [FT]	CABLE/CONNECTORS	MATES TO	TEMPERATURE	SPECIFICATIONS
FSH04503	15	ZCC200 to Cable Assembly	Flying Leads (Bare Wires)	-67 to 221°F (-55 to 105°C)	4 Pin Micro to Cable Assembly, IP67, Material - PVC, 28AWG 4 Conductor Braided Shielded
FSH04538	30				
FSH04539	15	ZCC200 to Binder Male Plug 99 5129 00 12 with TEDS (IEEE1451.4)	IHH500 w/ TEDS IEEE1451.4	-22 to 203°F (-30 to 95°C)	
FSH04548	15	ZCC200 to Binder Male Plug 99 5129 00 12	IHH500/USB520	-40 to 158°F (-40 to 70°C)	
FSH04738	15	ZCC200 to 10 Pin Hirose	USB225		

Drawing Number: FI1530-B

FUTEK reserves the right to modify its design and specifications without notice. Please visit <http://www.futek.com/salesterms> for complete terms and conditions.