# **HS-422SRT Accelerometer**


4-20mA acceleration and PT100 temperature output via PUR Cable

# **Key Features**

- · Side entry for easy access
- PT100 temperature output
- Waterproof
- · Resistant to oil

#### Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical

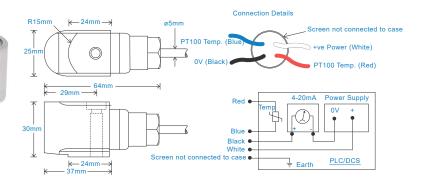

### **Technical Performance**

Mounted Base Resonance 10kHz min **Acceleration Ranges** see: 'How To Order' table ±10% Nominal 80Hz at 22°C 10Hz (600cpm) to 5kHz (300kcpm) ± 5% Frequency Response - ISO10816 Base isolated Isolation Range see: 'How To Order' table Temperature Output PT100 (100 Ohms) Transverse Sensitivity Less than 5%

### Mechanical

Case Material Stainless Steel Sensing Element/Construction PZT/Compression Mounting Torque Mounting Bolt Provided see: 'How To Order' table x 30mm long Weight 185gms (nominal) Maximum Cable Length 1000 metres Standard Cable Length 5 metres Screened Cable PUR - length to be specified with order Mounting Threads see: 'How To Order' table Submersible Depth 100 metres max. (10 bar)


### Electrical

# Current Output 4-20mA DC proportional to acceleration Supply Voltage 15-30 Volts DC (for 4-20mA) Settling Time 2 seconds Output Impedance Loop Resistance 600 Ohms max. at 24 Volts Case Isolation >108 Ohms at 500 Volts

### Environmental

Operating Temperature Range	-25 to 90°C
Sealing	IP68
Maximum Shock	5000g
EMC	EN61326-1:2013

# Typical Frequency Response

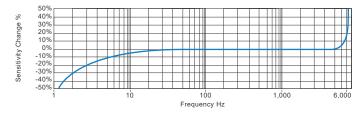


# **Applications**

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



# How To Order

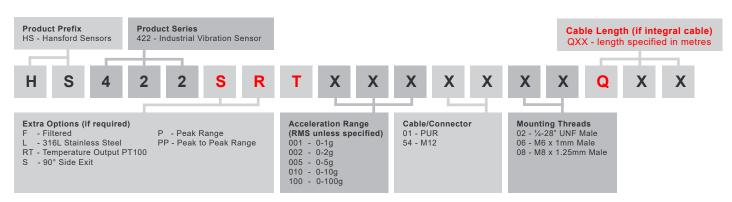



www.hansfordsensors.com sales@hansfordsensors.com



# **HS-422SRT Accelerometer**

4-20mA acceleration and PT100 temperature output via M12 Connector


# **Key Features**


- · Side entry for easy access
- For use with PLC/DCS systems
- PT100 temperature output

### Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical







# **Technical Performance**

Mounted Base Resonance 10kHz min **Acceleration Ranges** see: 'How To Order' table ±10% Nominal 80Hz at 22°C 10Hz (600cpm) to 5kHz (300kcpm) ± 5% Frequency Response - ISO10816 Base isolated Isolation Range see: 'How To Order' table Temperature Output PT100 (100 Ohms) Transverse Sensitivity Less than 5%

#### Mechanical

Case Material Stainless Steel
Sensing Element/Construction PZT/Compression
Mounting Torque 8NM
Mounting Bolt Provided see: 'How To Order' table x 30mm long
Weight 185gms (nominal)
Screened Cable Assembly HS-AC010 - straight
HS-AC011 - right angle
Mounting Threads see: 'How To Order' table

### Electrical

Current Output 4-20mA DC proportional to acceleration
Supply Voltage 15-30 Volts DC (for 4-20mA)
Settling Time 2 seconds
Output Impedance Loop Resistance 600 Ohms max. at 24 Volts
Case Isolation >10<sup>8</sup> Ohms at 500 Volts

### Environmental


 Operating Temperature Range
 -25 to 90°C

 Sealing
 IP67

 Maximum Shock
 5000g

 EMC
 EN61326-1:2013


# Typical Frequency Response

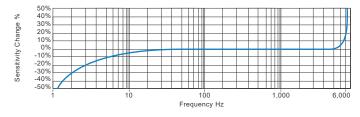


### **Applications**

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



# How To Order

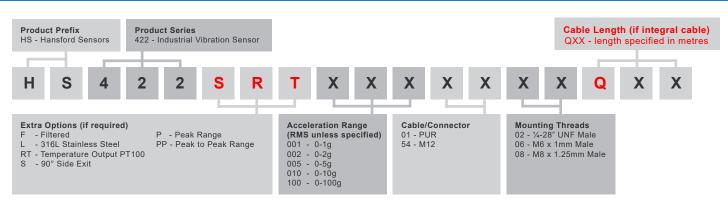



www.hansfordsensors.com sales@hansfordsensors.com

